



Illustration exemplary

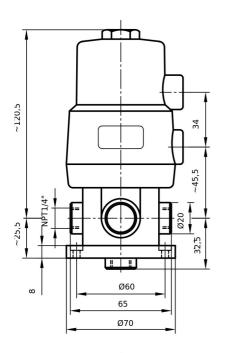



All data in mm; Illustration exemplary

## 6D802F0414PVFP

Ball valve (Series 6D) with pneumatic part-turn actuator (STANDARD), spring return, with female G- or NPT-thread, 3-way, vertical, with L-bore

emtechnik implybetter

## **Technical data**

| Connection              | NPT1/4"   |
|-------------------------|-----------|
| Nominal Diameter        | DN04      |
| Material Body           | PVDF      |
| Material O-ring         | FKM       |
| Material Ball           | PVDF      |
| Material Sealing Sleeve | PTFE      |
| Material Pressure Screw | PVDF      |
| Kvs Value               | 0.58 m³/h |
| Max. Media Temperature  | 140°C     |
| Pressure Stage          | PN10      |
| Control Pressure        | 6 bar     |
| Torque                  | 2.5 Nm    |

Starting from the nominal pressure rating (at 20°C), the permissible pressure reduces with increasing media temperature.