




Illustration exemplary

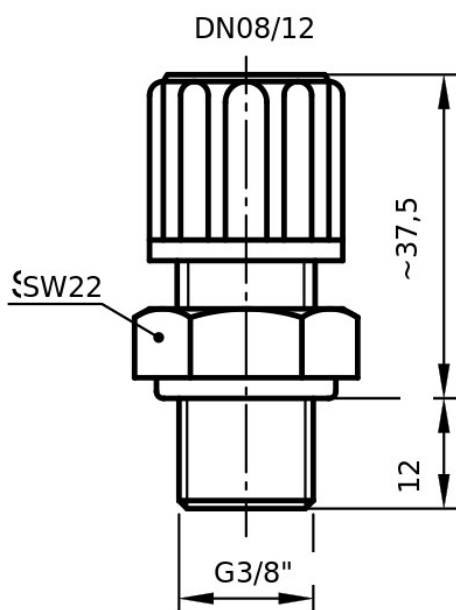

All data in mm; Illustration exemplary

## 1A100MG4638PV

Straight connector with connection for flexible tube (Series 1A) and male G-thread

### Technical data

Connection A	DN08/12
Connection B	G3/8"
Material Body	PVDF
Material O-ring	-
Pressure Stage	PN10
Max. Media Temperature	140°C

Starting from the nominal pressure rating (at 20°C), the permissible pressure reduces with increasing media temperature.