




Illustration exemplary

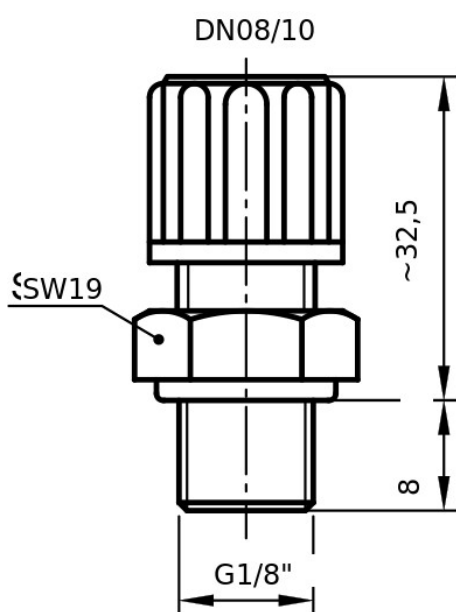

All data in mm; Illustration exemplary

1A100MG4518PPEP

Straight connector with connection for flexible tube (Series 1A) and male G-thread

Technical data

| | |
|------------------------|---------|
| Connection A | DN08/10 |
| Connection B | G1/8" |
| Material Body | PP |
| Material O-ring | EPDM |
| Pressure Stage | PN10 |
| Max. Media Temperature | 90°C |

Starting from the nominal pressure rating (at 20°C), the permissible pressure reduces with increasing media temperature.